



**Note**




**PHYSICAL SPECIFICATIONS**

Type No.	Approx. Wt. Lbs. (Kgs)	Dimensions In (mm)		
		L	W	H
UB30H	73.5(33.4)	13 9/16 (344)	6 13/16(173)	10 3/16 (259)

**ELECTRICAL SPECIFICATIONS**

Volts	Terminal	CCA @ 0F	CA @ 32F	Capacity @ 80F	Minutes Discharged at						Ampere Hour Capacity				
					75A	50A	25A	15A	8A	5A	100Hr Rate	20Hr Rate	6Hr Rate	3Hr Rate	1Hr Rate
12	F	550	760	184	49	82	195	340	685	1150	109	97.6	85.2	78.6	64.5

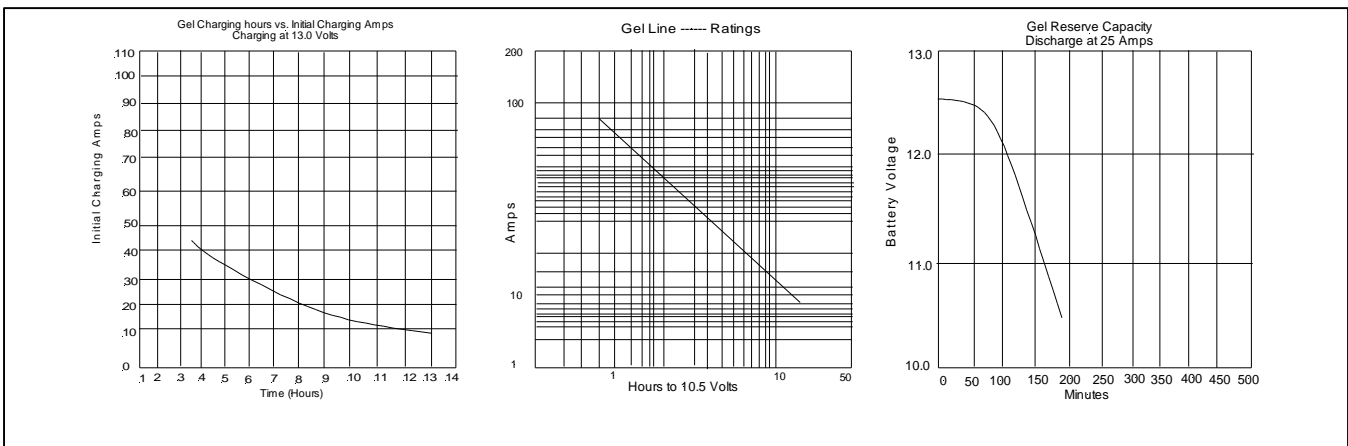

**Terminals:**

- A (Automotive Post)
- Z (Automotive Post with hole to accept thru bolt) in two heights: Short & Long.
- L1 ("L" Terminal with clearance hole to accept 1/4" thru bolt)
- L2 ("L" Terminal with clearance hole to accept 5/16 thru bolt)
- L3 ("L" Terminal with clearance hole to accept 3/8" thru bolt, terminal height 1.2")
- L4 ("L" Terminal with clearance hole to accept 3/8" thru bolt, terminal height 1.5")
- C (Marine Combo terminal: Automotive Post and stud 5/16")
- S (Stud 3/8")
- F (Marine Flag terminal to accept 3/8" thru bolt)