



**NOTE**




**PHYSICAL SPECIFICATIONS**

Type No.	Approx. Wt. Lbs. (Kgs)	Dimensions In (mm)		
		L	W	H
UB24	53.5(24.3)	10 7/8(276)	6 3/4 (171)	9 7/8 (251)

**ELECTRICAL SPECIFICATIONS**

Volts	Terminal	CCA 0 F	CA 32F	Capacity 80F	Minutes Discharged at						Ampere Hour Capacity			
					75A	50A	25A	15A	8A	5A	20Hr Rate	6Hr Rate	3Hr Rate	1Hr Rate
12	Z	410	575	132	33	57	140	245	500	845	73.6	64.5	59.3	48.5

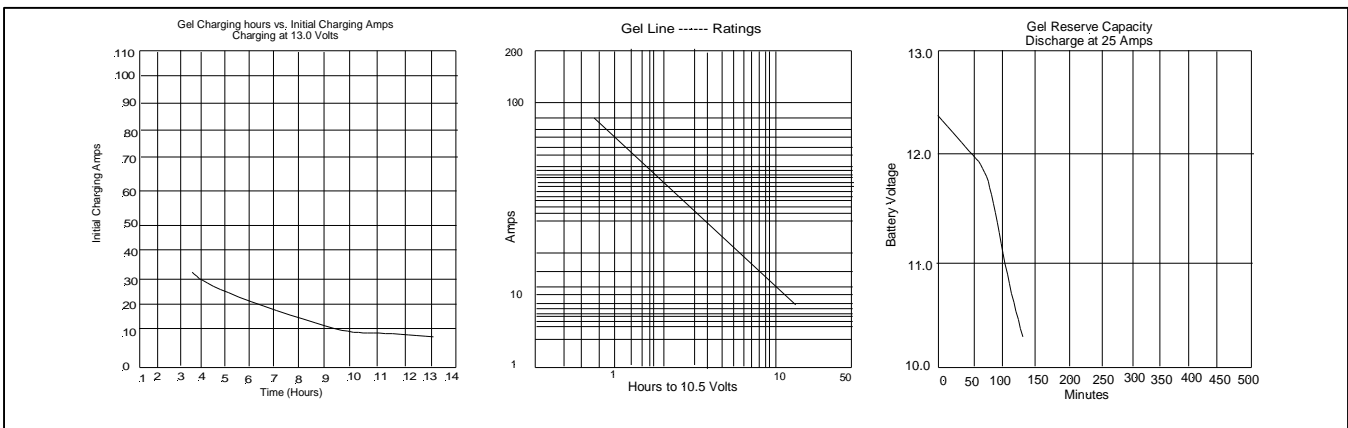

- Terminals:**
- A (Automotive Post)
  - Z (Automotive Post with hole to accept thru bolt) in two heights: Short & Long.
  - L1 ("L" Terminal with clearance hole to accept 1/4" thru bolt)
  - L2 ("L" Terminal with clearance hole to accept 5/16" thru bolt)
  - L3 ("L" Terminal with clearance hole to accept 3/8" thru bolt, terminal height 1.2")
  - L4 ("L" Terminal with clearance hole to accept 3/8" thru bolt, terminal height 1.5")
  - C (Marine Combo terminal: Automotive Post and stud 5/16")
  - S (Stud 3/8")
  - F (Marine Flag terminal to accept 3/8" thru bolt)